



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning and Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa



0 ~+5W Positive Power Tolerance



Easy Installation



30

YEARS
PERFORMANCE
WARRANTY

☉ 30 Years performance warranty

☉ 12 Years product warranty




RoHS



ELECTRICAL CHARACTERISTICS

Model	BM150-ST3412
Peak Power (Pmax)	150W
Maximum Power Voltage (Vmp)	27.94V
Maximum Power Current (Imp)	5.37A
Open Circuit Voltage (Voc)	32.80V
Short Circuit Current (Isc)	5.73A
Weight	9.39Kg
Maximum System Voltage	DC600V
Operating Temperature	45°C
Security Class	C
Maximum Series Fuse Rating	10A
Dimension	1067×706×30

PHYSICAL CHARACTERISTICS

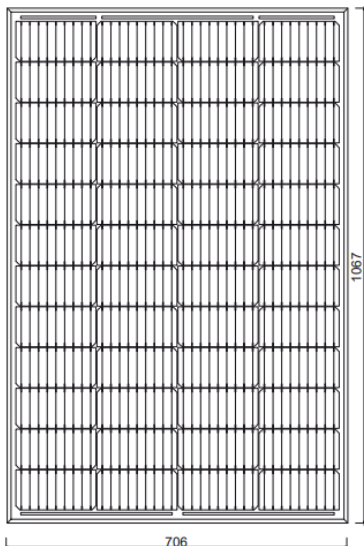

ELECTRICAL CHARACTERISTICS

