



**High Conversion Efficiency**

High panel efficiency to guarantee high power output



**Self-Cleaning and Anti-Reflection Glass**

Coating glass for self-cleaning reduces surface dust



**Outstanding Low Irradiation Glass**

Outstanding panel performance even in weak light conditions



**Excellent Durability**

Wind load up to 2400 Pa, Snow load up to 5400 Pa



**0 ~+5W Positive Power Tolerance**



**Easy Installation**



**30**

YEARS  
PERFORMANCE  
WARRANTY

☉ 30 Years performance warranty

☉ 12 Years product warranty




**RoHS**

**ELECTRICAL CHARACTERISTICS**

Model Type	BM5305-ST6578
Peak Power (Pmax)	530W
Maximum Power Voltage (Vmp)	41.60V
Maximum Power Current (Imp)	12.75A
Open Circuit Voltage (Voc)	49.40V
Short Circuit Current (Isc)	13.58A
Weight	27.2 Kg
Maximum System Voltage	DC1500V
Operating Temperature	45°C
Security Class	C
Maximum Series Fuse Rating	25A
Dimension	2279×1134×35mm

**PHYSICAL CHARACTERISTICS**

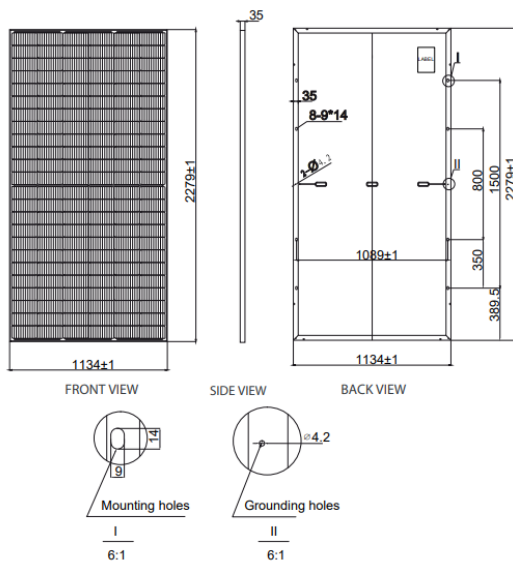

**ELECTRICAL CHARACTERISTICS**

