



High Conversion Efficiency

High panel efficiency to guarantee high power output



Self-Cleaning and Anti-Reflection Glass

Coating glass for self-cleaning reduces surface dust



Outstanding Low Irradiation Glass

Outstanding panel performance even in weak light conditions



Excellent Durability

Wind load up to 2400 Pa, Snow load up to 5400 Pa



0 ~+5W Positive Power Tolerance



Easy Installation



30

YEARS
PERFORMANCE
WARRANTY

☉ 30 Years performance warranty

☉ 12 Years product warranty



IEC




CE

RoHS

ELECTRICAL CHARACTERISTICS

Model Type	BM540-ST6578
Peak Power (Pmax)	540W
Maximum Power Voltage (Vmp)	42.00V
Maximum Power Current (Imp)	12.86A
Open Circuit Voltage (Voc)	49.80V
Short Circuit Current (Isc)	13.70A
Weight	27.2 Kg
Maximum System Voltage	DC1500V
Operating Temperature	45°C
Security Class	C
Maximum Series Fuse Rating	25A
Dimension	2279×1134×35mm

PHYSICAL CHARACTERISTICS

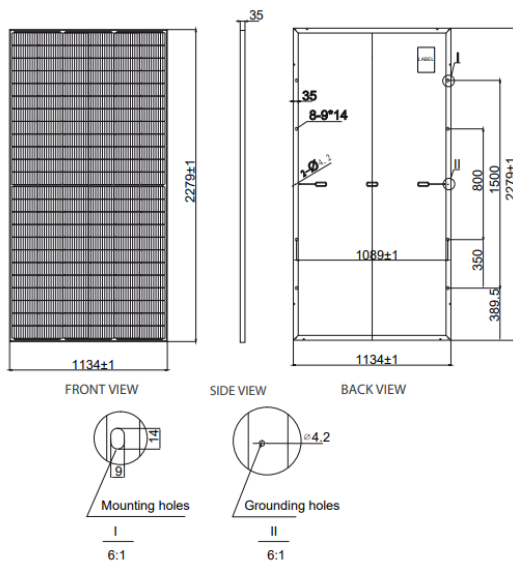

ELECTRICAL CHARACTERISTICS

